

JinkoSolar Energizes Nigerian Mini Grid with 2.03MWh Innovative C&I Energy Storage Solution


Jinkosolar today announced it has delivered its 2.03MWh C&I energy storage system (JKS196-675K-150H) to A4&T Power Solutions for a mini grid project under the REA Perfor-

lifespan of the batteries and ensures optimum performance even in the toughest of climates.


It has a slick compact design with the flexibility to fit into indoor as well as outdoor spaces, thanks to the outdoor-rated enclosure. With IEC62619, UL9540A, CE, UN 38.3 certifications, and built-in fire suppression, this ESS offers safe operation and peace of mind.

In addition to standalone operation in off-grid mode for power backup, Jinkosolar's C&I ESS provides peak shaving for demand charge management, load shifting for time-of-use savings.

Figure 1: Project Photos

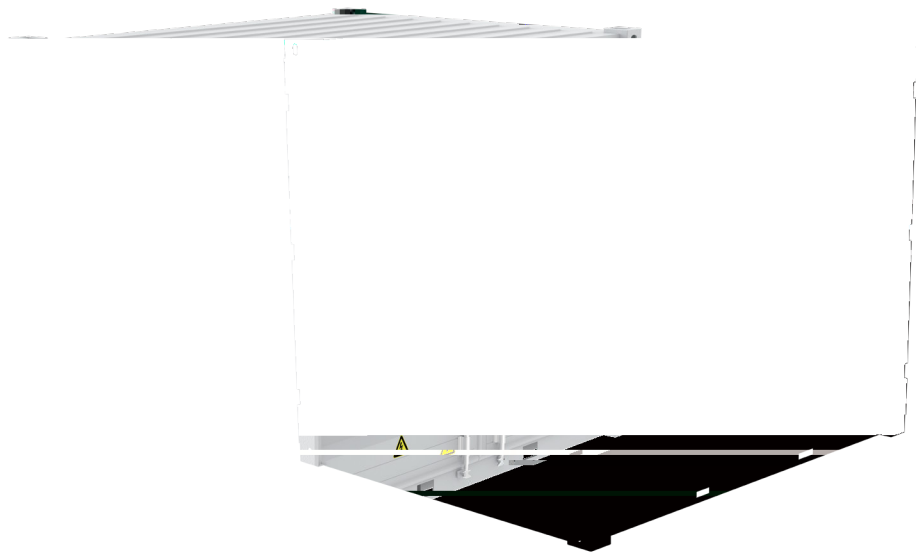

- Highly integrated system with various working modes
- [Ct 0I-gŠwē ŠyādzwŠā f2y3Šw 0I-gŠwē tATŠ I-yŔ KłEKŠw āI-TŠūē
- tNŠnLJ2LJdzfI-úŠŔ ūwI-yāLJ2wúI-ə2yŠyI-otŠā Tl-āúŠw λyπāwŠ λyāwI-ftI-ə2y
- LyŕŠ3wI-úŠŔ I-yŔ 2LJəYłTŠŔ ŪwŠ LwLJ2úŠ0ə2yŔŠāŁyŔ KłEKŠw āŠ0dzwūē

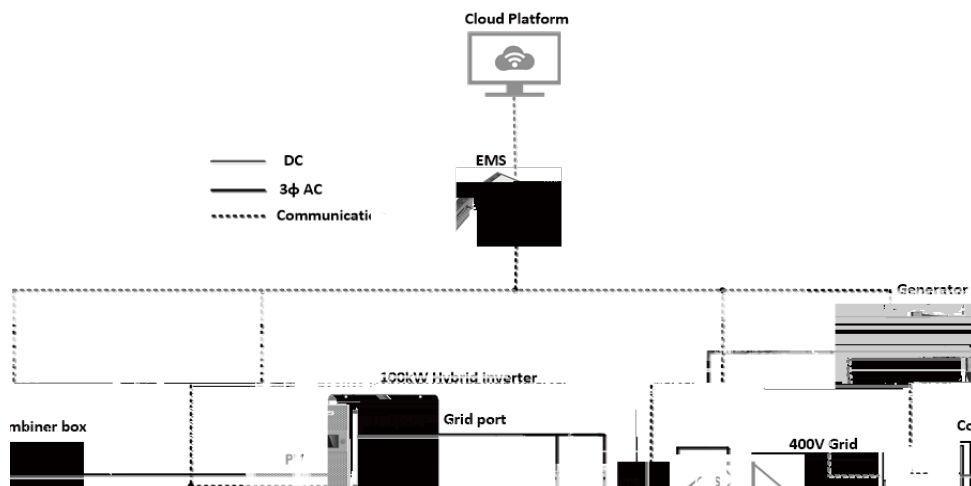

SYSTEM TECHNICAL SPECIFICATIONS

DC Data	JKS196K-150H	JKS405K-150H	JKS675K-150H		
Battery Chemistry	Lithium Iron Phosphate (LFP)				
Charging Current					
Charging Voltage	3.2V/96Ah				
Battery Module Configuration	2P8S	3P11S			
DC Energy Storage Capacity	196kWh	405kWh			
Battery Temperature	512V				
Temperature Protection Range	448V~576V				
Battery Communication Interface	RS485, Ethernet				
Battery Communication Protocol	Modbus RTU , Modbus TCP				
System Tolerance Temperature	1000V				
Max. Power / System Temperature	120/240kW				
Max. Power Factor	250-850V				
Max. Power Factor @Max. Power	450-850V				
AC Data					
Max. AC Power	150kW				
Max. AC Power Factor	165kW				
Max. Temperature	400V				
AC Maximum Current	216A				
HD	≤3%				
Power Factor	1(leading) ~1(lagging)				
Frequency (Hz)	50/60Hz				
ACC. Power	3W+N+PE				
Max. Power	150kW				
Max. Power Factor	≤20ms				
General Data					
Dimensions (*D*H)	2,991*2,438*2,591mm		6,058*2,438*2,591mm		
Weight	< 10T		< 15T		
Protection Level	IP54				
Operating Temperature Range	-20~40℃				
Humidity	0~95% (non-condensing)				
Max. Altitude	3,000m				
Cooling System	DC Fan				
Cooling System Interface	RS485, Ethernet, GPRS				
Certification	UL9540A, IEC62619, CE, UN38.3				

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

6 11y12 {2T+H /2# [ÚR# !ff W3Kúâ WŠaŠWŠR# {LŠÖWÜÖt-ə2ya İyÖttzŘŠŘ İyÚKİa Řt-út-âKŠŠú İWŠ âwöZŠÖü ü2 ÖKİyaŠ öNúK2dzú y2əÖŠ#